


SensiFLASH 200

High Intensity Illumination Flash System


The SensiFLASH 200 is used for imaging of high speed phenomena where a high intensity illumination flash system is required. Producing between 40-200 joules of flash energy and a duration of 5-200 μ s, makes the SensiFLASH ideal for use with gated CCD cameras.

SPECIFICATIONS

<i>Power:</i>	• 40 - 200 joules
<i>Duration:</i>	• 5 - 200 μ s
<i>Jitter:</i>	• 2 μ s
<i>Rise Time:</i>	• 5 μ s
<i>Lamp:</i>	• xenon - 5 mm point source
<i>Light Delivery:</i>	• fiber optic or reflector output
<i>Charge Time:</i>	• 30 seconds
<i>Photocell Detection</i>	
<i>Trigger:</i>	• TTL 5 V Positive pulse output (triggering the SensiCam CCD Camera)
<i>Trigger:</i>	• TTL to 10 volts - square wave
<i>Power Supply:</i>	• universal (85 -260 VAC, 3 amps)
<i>Spectral Peak:</i>	• 550 nm
<i>Dimensions:</i>	• 234 mm X 264 mm X 350 mm
<i>Weight:</i>	• 12 kg - 16 kg
<i>Applications:</i>	• spray, droplet and small ballistics

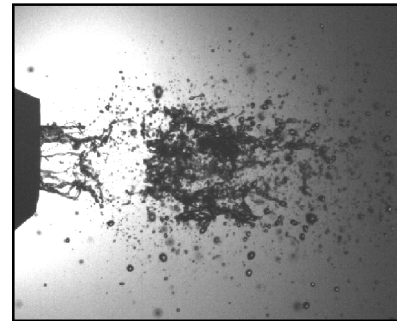

Spray and Particle: 5 microseconds, field-of-view 10 mm x 7.5 mm

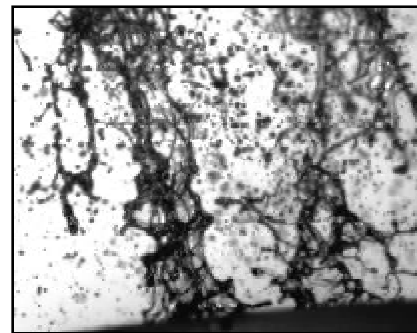

Oil Spray: 800 ns exposure, 4 μ s delay, 9 mm field-of-view and 35 μ s duration xenon flash

ORDERING INFORMATION

SensiFLASH 200 comes complete with SensiFLASH unit, lamp, coaxial cable and 110 VAC line cord.

the
cooke
corporation

6930 Metroplex Drive
Romulus, MI 48174

Tel. (248) 276-8820 Fax (248) 276-8825
info@cookecorp.com
www.cookecorp.com